Installation instructions
DASATOP® FIX

Installation steps

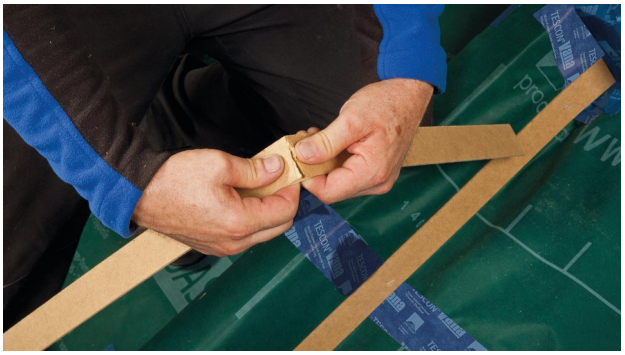

1. Cut to length by hand

Simply break off the strip at the desired length.

2. Attach the strip

Position the DASATOP FIX strip at the rafter and attach it using a stapler, for example.

General conditions

Separation distance between fasteners approx. 15 cm

The applications and conditions described here are based on current research findings and practical experience. We reserve the right to change the recommended application designs and installation methods and to develop and thus change the properties and quality of individual products. We would be glad to inform you about the current state of engineering knowledge at the time that your installation is carried out.

The planning documentation that is available from pro clima provides further information about installation methods and design details. If you have questions, please contact pro clima Technical Support in Germany at +49 6202 278245.

MOLL
bauökologische Produkte GmbH
Rheintalstraße 35 - 43
68723 Schwetzingen
Germany
Phone: +49 6202 2782 0
eMail: info@proclima.com