


# Installation instructions

## DASATOP® FIX

---

### Installation steps

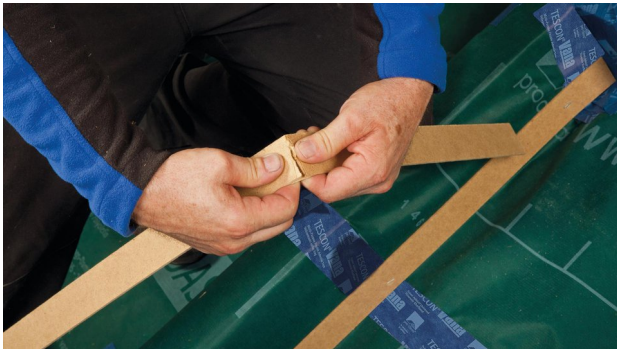

#### 1. Cut to length by hand

Simply break off the strip at the desired length.



#### 2. Attach the strip

Position the DASATOP FIX strip at the rafter and attach it using a stapler, for example.

### General conditions

Separation distance between fasteners approx. 15 cm

---

The information provided here is based on practical experience and the current state of knowledge. We reserve the right to make changes to the recommended designs and processing or to make alterations due to technical developments and associated improvements in the quality of our products. We would be happy to inform you of the current technical state of the art at the time you use our products.

Further information about installation and design details is available in the pro clima planning documentation. If you have any questions, please contact [pro clima Technical Support](<https://proclima.com/service/technical-support>).

---

**MOLL**  
**bauökologische Produkte GmbH**  
Rheintalstraße 35 - 43  
D-68723 Schwetzingen  
Fon: +49 (0) 62 02 - 27 82.0  
eMail: [info@proclima.de](mailto:info@proclima.de)